



TRENCH SAFETY SOLUTIONS



**REMEMBER THE
TRENCH SAFETY**



STEEL TRENCH SHIELD



STEEL MANHOLE BOX



MANHOLE ROUND



STEEL FRAMED ALUMINUM SHIELDS



ALUMINUM MODULAR PANELS



VERTICAL HYD SHORING

STEEL TRENCH BOXES

4" MEDIUM DUTY							Maximum Depth Rating			
Model	Height	Length	Pipe Clearance	Weight	PSF	A-25	B-45	C-60	C-80	
XTS-4M-412	4'	12'	16"	3,409 lbs	2,627	52'	52'	44'	34'	
XTS-4M-416	4'	16'	16"	4,248 lbs	1,395	52'	33'	24'	20'	
XTS-4M-420	4'	20'	16"	5,086 lbs	965	34'	20'	15'	12'	
XTS-4M-812	8'	12'	64"	5,701 lbs	1,771	52'	44'	34'	26'	
XTS-4M-816	8'	16'	64"	7,165 lbs	1,339	52'	34'	24'	20'	
XTS-4M-820	8'	20'	64"	8,726 lbs	965	38'	23'	20'	14'	
XTS-4M-1016	10'	16'	84"	9,046 lbs	973	42'	26'	18'	17'	
XTS-4M-1020	10'	20'	84"	10,216 lbs	779	35'	22'	16'	14'	

6" MEDIUM DUTY							Maximum Depth Rating			
Model	Height	Length	Pipe Clearance	Weight	PSF	A-25	B-45	C-60	C-80	
XTS-6M-424	4'	24'	16"	6,539 lbs	956	38'	22'	16'	13'	
XTS-6M-820	8'	20'	64"	9,902 lbs	1,390	52'	35'	25'	21'	
XTS-6M-824	8'	24'	64"	11,444 lbs	945	40'	25'	18'	14'	
XTS-6M-1020	10'	20'	84"	12,135 lbs	1,224	52'	32'	24'	20'	
XTS-6M-1024	10'	24'	84"	14,274 lbs	940	41'	24'	21'	15'	



Texas First Rentals

ALUMINUM MODULAR PANELS


ALUMINUM DEPTH RATING CHART					
Model	Weight	Maximum Depth Rating			
		A-25	B-45	C-60	C-80
XAP-2X4	62 lbs	30'	30'	30'	30'
XAP-2X6	90 lbs	30'	30'	30'	30'
XAP-2X8	118 lbs	30'	30'	25'	25'
XAP-2X10	146 lbs	30'	30'	21'	16'
XAP-2X12	174 lbs	30'	20'	15'	12'

STEEL FRAMED ALUMINUM SHIELD

STEEL FRAMED ALUMINUM SHIELD							
Model	Capacity (PSF)	Maximum Depth Rating				Vertical Pipe Clearance	Estimated Weight
		A-25	B-45	C-60	C-80		
XAMS-608	1215	30'	25'	20'	15'	25"	892 lbs
XAMS-808	1212	30'	25'	20'	15'	36"	1,245 lbs
XAMS-810	929	25'	20'	15'	12'	36"	1,530 lbs

OUR BRANCH LOCATION

SAN ANTONIO
 3439 Roosevelt Ave.
 San Antonio, TX 78214
 210-523-1256

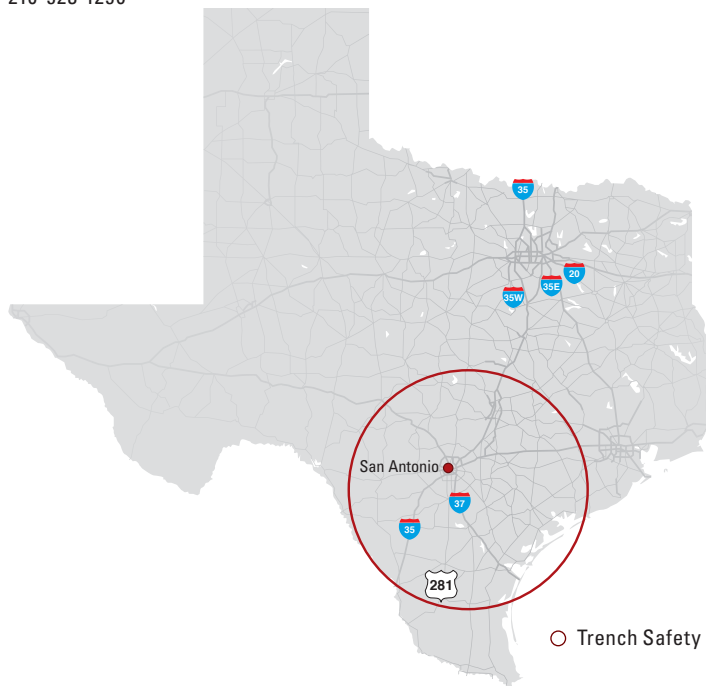

○ Trench Safety Solutions

ROAD PLATES

Description	Weight
STEEL 1" PLATE 5' X 8'	1,634 lbs
STEEL 1" PLATE 5' X 10'	2,042 lbs
STEEL 1" PLATE 6' X 10'	2,545 lbs
STEEL 1" PLATE 8' X 10'	3,267 lbs
STEEL 1" PLATE 8' X 12'	3,921 lbs
STEEL 1" PLATE 8' X 15'	5,228 lbs
STEEL 1" PLATE 8' X 20'	6,534 lbs



TESTING EQUIPMENT

SEWER PLUG 4-6"
TEST PLUG 4-6"
SEWER PLUG 6-10"
TEST PLUG 6-10"
SEWER PLUG 8-12"
TEST PLUG 8-12"
SEWER PLUG 12-24"
TEST PLUG 12-24"
SEWER PLUG 15-30"
TEST PLUG 15-30"
SEWER PLUG 24-48"
TEST PLUG 24-48"
MANDREL 8" SA SPEC
MANDREL 10" SA SPEC
MANDREL 12" SA SPEC
ROPE HOSE
TRIPLE HOSE
TEST PANEL
HYD TEST PUMP
HYD TEST PUMP HV
RIP CORDS
27.5-32" MANHOLE BLADDER TEST
38" PLATE TEST
MANHOLE BLOWER GAS
MANHOLE BLOWER ELECTRIC
MANHOLE TRIPOD
ROPE AND REEL
WIRE REEL
VACUUM GENERATOR
PARACHUTE 8-12"
PIPE LASER
GAS MONITOR

VERTICAL HYD SHORING

KIT: 1.5' SHORE 22-36" CYL
KIT: 1.5' SHORE 28-46" CYL
KIT: 1.5' SHORE 34-55" CYL
KIT: 1.5' SHORE 52-88" CYL
KIT: 3.5' SHORE 22-36" CYL
KIT: 3.5' SHORE 28-46" CYL
KIT: 3.5' SHORE 34-55" CYL
KIT: 3.5' SHORE 52-88" CYL
KIT: 5' SHORE 22-36" CYL
KIT: 5' SHORE 28-46" CYL
KIT: 5' SHORE 34-55" CYL
KIT: 5' SHORE 52-88" CYL
KIT: 7' SHORE 22-36" CYL
KIT: 7' SHORE 28-46" CYL
KIT: 7' SHORE 34-55" CYL
KIT: 7' SHORE 52-88" CYL
KIT: 8' SHORE 22-36" CYL
KIT: 8' SHORE 28-46" CYL
KIT: 8' SHORE 34-55" CYL
KIT: 8' SHORE 52-88" CYL
KIT: 12' SHORE 22-36" CYL
KIT: 12' SHORE 28-46" CYL
KIT: 12' SHORE 34-55" CYL
KIT: 12' SHORE 52-88" CYL
KIT: 16' SHORE 22-36" CYL
KIT: 16' SHORE 28-46" CYL
KIT: 16' SHORE 34-55" CYL
KIT: 16' SHORE 52-88" CYL
24" EXT CYL
42" EXT CYL
56" EXT CYL
FINN FORM BOARD 4' X 4'
FINN FORM BOARD 4' X 8'
FINN FORM BOARD 4' X 12'
HAND PUMP FOR SHORING
RELEASE TOOL 48"
RELEASE TOOL 96"

For our latest branch openings, go to [TexasFirstRentals.com](https://www.TexasFirstRentals.com)



Texas First Rentals

© 2020 Texas First Rentals
 Equipment specifications, availability, and rental rates are subject to change.
 © 2020 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.
www.cat.com / www.caterpillar.com